

Indoor Digital Signage Display

2500nit High-brightness Single Screen



DESCRIPTION

LCD screen available in different inch sizes with ceiling installation. Elegant and versatile, it is an innovative tool for indoor digital signage.

- Digital display with 2500 nit brightness and sunlight-readable screen
- Optional Android RK3288/3568/3399 chip. 2GB+16GB, Android 7.1 or 11 system
- Single-screen with super-slim design and integrated speakers
- Support for Wifi, USB, HDMI, RJ45 multiple interfaces
- Ceiling installation
- Available in sizes: 43", 49", 55", 65", and 75"







It finds application especially for use in shop windows. The device has a 2500 nit high-brightness screen that can be read even in sunlight and can display promotional information, videos, images or text. Android operating system and media player. The CMS supports editing and uploading content to be displayed on the screen anytime and anywhere via the Internet.




AVAILABLE IN THESE FORMATS:

TOTEM-INF43-C-S	Digital Signage Showcase Totem with Ceiling Installation Single screen 43"
TOTEM-INF49-C-S	Digital Signage Showcase Totem with Ceiling Installation Single screen 49"
TOTEM-INF55-C-S	Digital Signage Showcase Totem with Ceiling Installation Single screen 55"
TOTEM-INF65-C-S	Digital Signage Showcase Totem with Ceiling Installation Single screen 65"
TOTEM-INF75-C-S	Digital Signage Showcase Totem with Ceiling Installation Single screen 75"

TECHNICAL SPECIFICATIONS:

Dimensions	43"	49"	55"	65"	75"
LCD Specifications					
Active Area	941.18×529.42	1073.78×604	1209.6×680.4	1428.5×803.5	1650*928mm
Contrast	1200:1	1200:1	1400:1	1400:1	1400:1
Resolution	1920*1080/3840*2160	1920*1080/3840*2160	3840*2160	3840*2160	3840*2160
Brightness	2500cd/m2 (optional 3000cd/m2)				
Direction	Vertical/horizontal (optional)				
Colors	16.7M				
Viewing Angle	178/178				
LED Backlight	Yes				
Display Mode	Horizontal or vertical				
Response Time	8ms				
Lifespan	50000(hrs)				
Hardware					
CPU	RK3568				
Memory	2GB				
Nand Flash	16GB				
Storage Ports	USB, SD card				
Operating System	Android 11				
Wi-Fi	Yes, Integrated WiFi (802.11b/g/n); Optional 4G				
Power					
Power	90-132VAC/180-264VAC				
Operating temperature	0°-60° (no condensation)				
Operating humidity	10%-85% (no condensation)				
Funzioni					
Video Support	MPEG1/MPEG2/MPEG4/AVI/VOB/MOV/WMV/DIVX/RM/RMVB, supports super HD 1080P/2160P video				
Image Support	JPG/JPEG/PNG/BMP				
TXT Support	TXT/WORD/EXCEL/PDF				
Website Support	HTML/ASP/JSP/PHP				
RSS Support	Title and text, flip/turn the page				
Remote Control	Real-time image monitoring				
Image Rotation	Image rotation support 90°, 180°, 270°				
Software Update	sw update via USB				
Structure					
Installation Method	Ceiling/wall mount				
Colour	Black				
Speaker	Integrated speaker (optional)				
Brightness Sensor	Yes, integrated				
Working Time	7*24 hours				

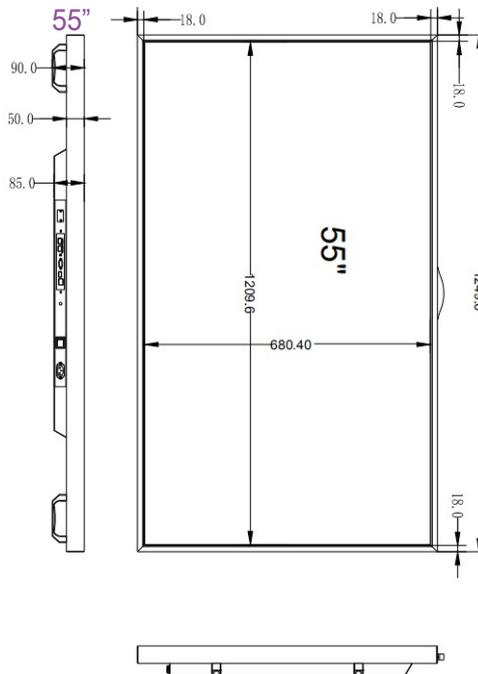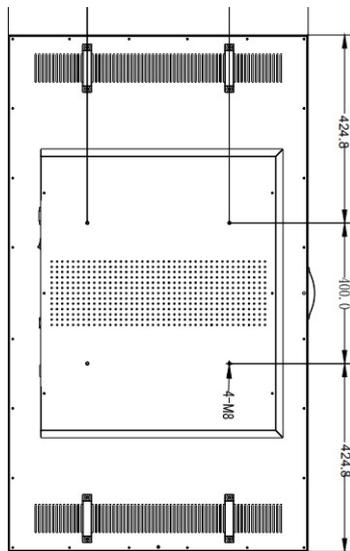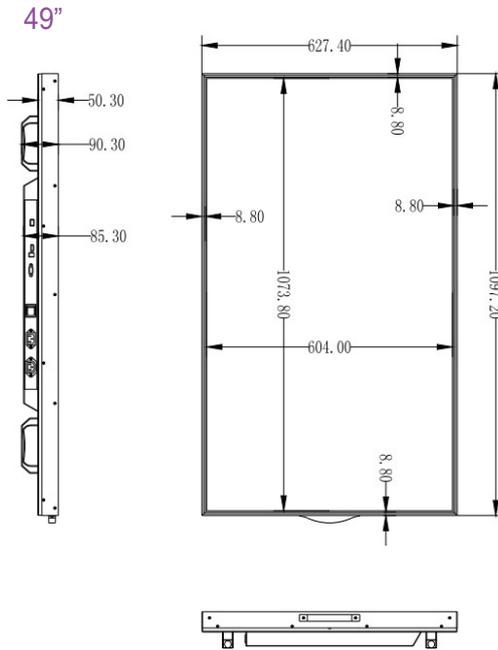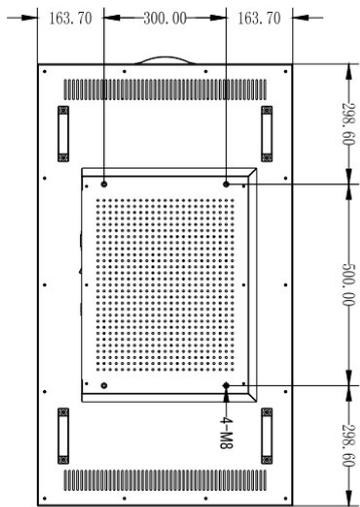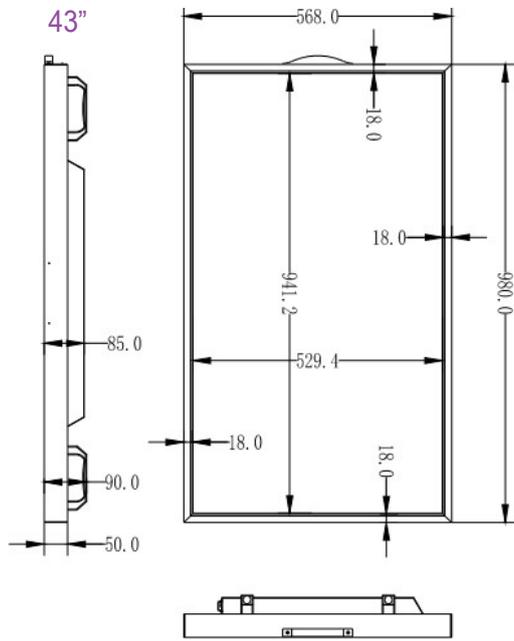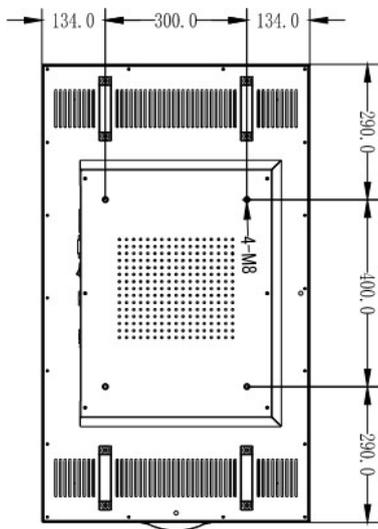

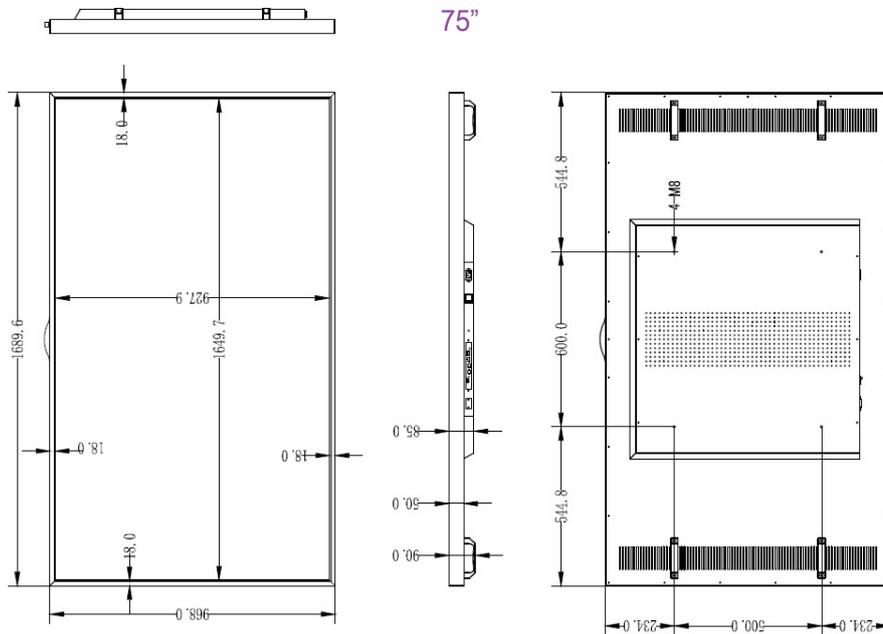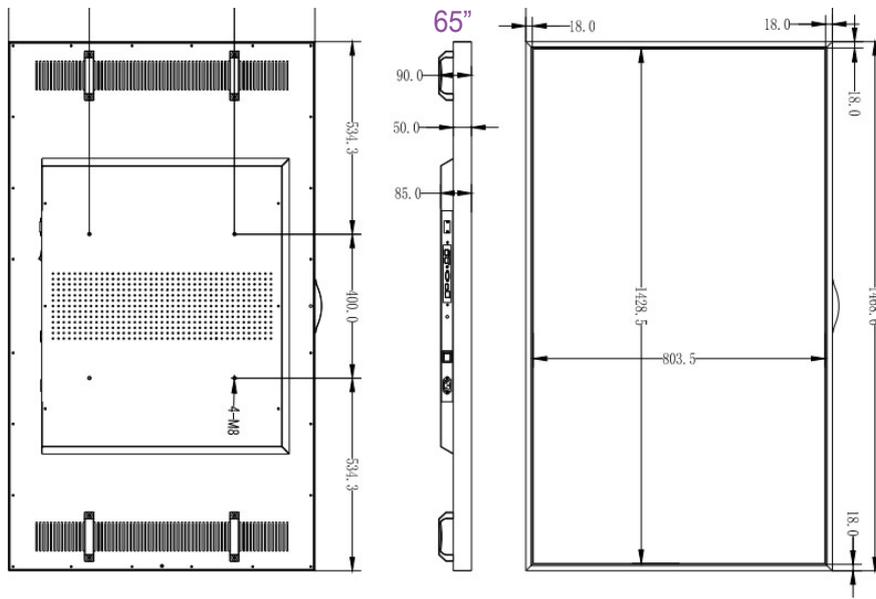

totem360.it

for more information: sales@infordata.it - 040 367 189